



# New Guard Coatings Group

A global reputation to protect.

The information herewith is given with the best of New Guard Coatings Group knowledge.

Rights are reserved to change and update the data without notice.

This information is not exhaustive and it is the user's responsibility to ensure that this data sheet is the most current by contacting their local New Guard Coatings Group branch prior to using the coating/product.

[www.newguardcoatings.com](http://www.newguardcoatings.com)

NORTH • SOUTH EAST • MIDLANDS • NORTH WEST • HULL • SCOTLAND

# RUST-OLEUM®


INDUSTRIAL



## 5130 DAMP SURFACE PRIMER

# Primer for damp floors

- Creates a barrier to stop rising moisture and vapour pressure
- Prevents blistering
- For use on asphalt and concrete
- Very low solvent content
- High build system

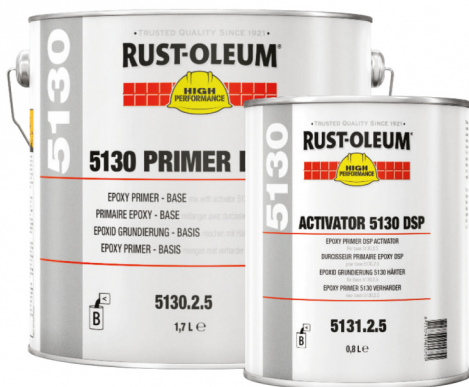

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

# 5130 DAMP SURFACE PRIMER

## DESCRIPTION

Epoxy primer for damp surfaces prevents air/moisture blistering on concrete and asphalt.

## RECOMMENDED USE

Suppression of vapor pressure effects to prevent air/moisture blistering on suspect concrete and asphalt balcony surfaces, suspended decking etc.

## TECHNICAL DATA

Density:	1,1
Gloss Level:	Gloss
Solids content in volume:	96%
Mixing Ratio:	Base : Activator = 1,7 : 0,8 (Volume)

## DRYING TIMES AT 20°C/RH 50%

Touch dry:	6 hours
Dry to handle:	16 hours
Dry to recoat:	After 16 hours, but within 48 hours
Fully cured:	2 days
Pot Life:	30 minutes

## RECOMMENDED WET FILM THICKNESS

250 µm

## RECOMMENDED DRY FILM THICKNESS

240 µm

## THEORETICAL CONSUMPTION

4m<sup>2</sup>/l

## PRACTICAL CONSUMPTION

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

## SURFACE PREPARATION

Ensure surfaces are sound, clean, contaminant-free and as dry as possible before coating. Thoroughly scrub down all dirty surfaces with Rust-Oleum ND 14 (see PDS) alkaline detergent solution followed by thorough rinsing (alternatively steam clean) and dry off. Remove residual contamination by scraping, surface grinding etc. Mechanically remove any unsound/incompatible coatings. Fully grind bare concrete to give an open sandpaper like surface. Reduce undulations/peaks etc by mechanical abrasion or grinding. Remove laitance by acid cleaning and subsequent rinsing. Best results are obtained when blasting the floor. Repair holes or large cracks with Pegacrete or 5180 Epoxy Repair Mortar (see PDS for details).

## DIRECTIONS FOR USE

Stir thoroughly prior to use. Add the B component (hardener) to the base and stir mechanically. Mix the base to even consistency. Add the activator whilst stirring into the vortex and mix thoroughly, ensuring all activator material is worked away from the sides and the bottom and incorporated (use brush). Transfer the necessary amount to an empty clean, dry plastic can and mix further to ensure thorough blending.

## APPLICATION CONDITIONS

Minimum 10°C. Provide air ventilation: open windows and doors.

## APPLICATION & THINNING: BRUSH

Use undiluted.

## APPLICATION & THINNING: ROLLER

Do not dilute. Use a 12-15 mm polyamide roller.

## APPLICATION & THINNING: RAKE/TROWEL

Spread out the necessary material over the surface and distribute evenly using a rake or trowel. Use a spike roller if necessary to de-aerate coating.

## CLEANING OF EQUIPMENT / SPILLS

Rust-Oleum Thinner 160.

## REMARKS

Do not apply to inadequately prepared or unsound surfaces. Do not apply as surface temperatures below 10°C or overnight ambient temperatures below 5°C. Low overnight temperatures may further extend minimum overcoating times. Overcoating should be carried out within the timescales above to promote maximum intercoat adhesion and avoid film defects. Ensure surfaces are clean between coats.

## SAFETY DATA

VOC level:	198 g/l
VOC readymix:	198 g/l
VOC category:	A/j
VOC limit:	350 g/l
Grenelle:	C
Flashpoint:	60 °C
Remarks regarding safety:	Consult Safety Data Sheet and Safety Information printed on the can.

## SHELF LIFE

3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35°C.

Date issued: 25/04/2018

**Available colours & pack sizes:** Please refer to the respective product page on [www.rust-oleum.eu](http://www.rust-oleum.eu) for an overview of actual available colours and pack sizes.

**Disclaimer:** The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from [www.rust-oleum.eu](http://www.rust-oleum.eu) or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

**Rust-Oleum Netherlands B.V.**  
Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T: +31 (0) 165 593 636  
F: +31 (0) 165 593 600  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Rust-Oleum UK Ltd.**  
PO Box 261  
Chester-le-Street  
DH3 9EH United Kingdom  
T: +44 (0)1914 113 146  
F: +44 (0)1914 113 147  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Rust-Oleum France S.A.S.**  
11, rue Jules Verne - B.P. 60039  
95322 St-Leu-La-Forêt Cedex  
France  
T: +33(0) 130 40 00 44  
F: +33(0) 130 40 99 80  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T: +32 (0) 13 460 200  
F: +32 (0) 13 460 201  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)